


DATA SHEET

Copper-bonded steel tape

Steel tape is molecularly bonded in electrolytic process with copper of thickness 0.070 mm. Copper coating protects against corrosion for the tens of years.

Sale unit is kilogram, the tolerance of weight $\pm 5\%$

Cat. no.	X x Y mm	Length m	Material
C1100272(60M)	20 x 3	60	steel copper-bonded to thickness of 0.070 mm
C1100273(40M)	25 x 3	40	
C1100274(30M)	25 x 4	30	
C1100279(40M)	30 x 3	40	
C1100275(30M)	30 x 4	30	
C1100281(20M)	40 x 4	20	
C1100283(20M)	40 x 5	20	

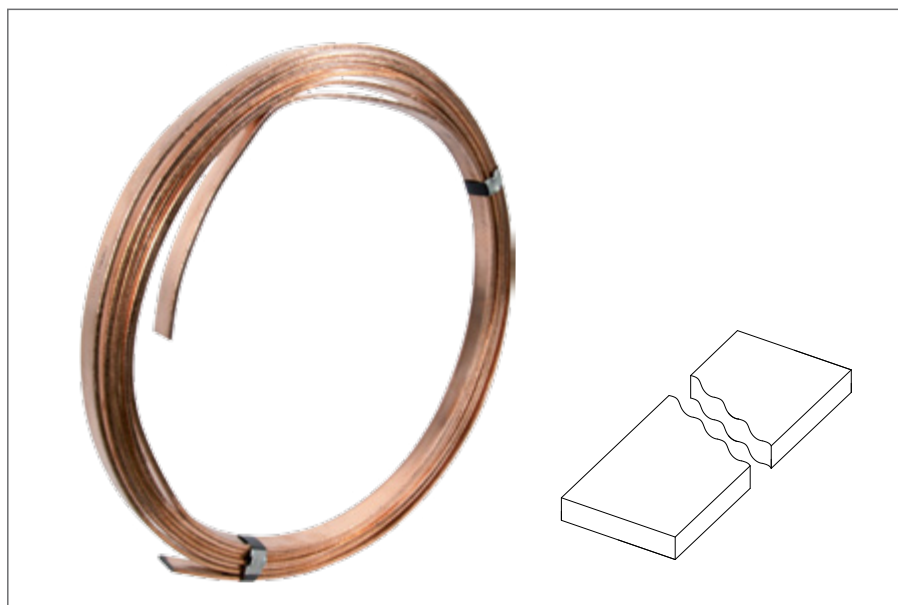

CBM Technology Sp. z o.o.

ul. Kasztanowa 2, 64-320 Niepruszewo, Poland

tel. +48/61 650 30 40

e-mail: office@cbm-technology.eu; www.cbm-technology.eu